

REVISION RECORD 修改紀錄					
	ECO	DESCRIPTION	DATE	DRFT	CHKD

NOTES:

1.MATERIAL:

- 1.1 Housing:thermoplastic plastics
- 1.2 terminals:Copper Alloy
Gold plated in contact area:
Tin plated in termination
Nickel Plated overall

- 1.3 Shell:Steel&Copper Alloy
Nickel Plated overall

2.ELECTRICAL CHARACTERISTICS:



- 2.1 Rating Current :1.5 Ampere
- 2.2 Rating Voltage :30 V Max
- 2.3 Contact Resistance:30 Milli ohms
- 2.4 Insulation Resistance:1000 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

- 3.1 Connector Mating force• 35N MAX(3.57Kgf)
- 3.2 Connector Unmating force:10N min(1.02Kgf)
- 3.3 Durability:1500Cycles.

4.ENVIRONMENT CHARACTERISTICS:

- 4.1 Operating temperature:−0℃ to +50℃
- 4.2 Storage temperature:−20℃ to +60℃

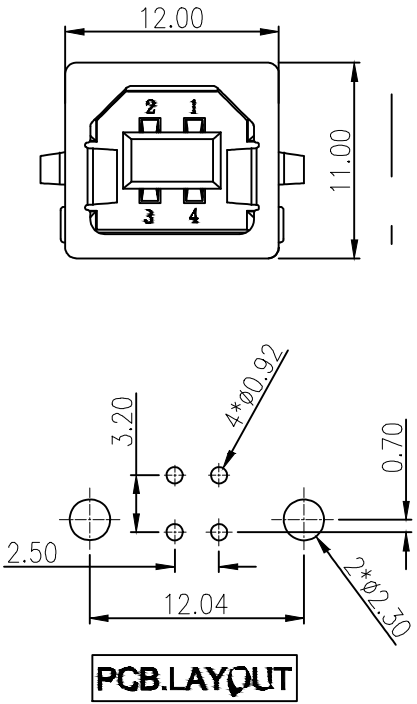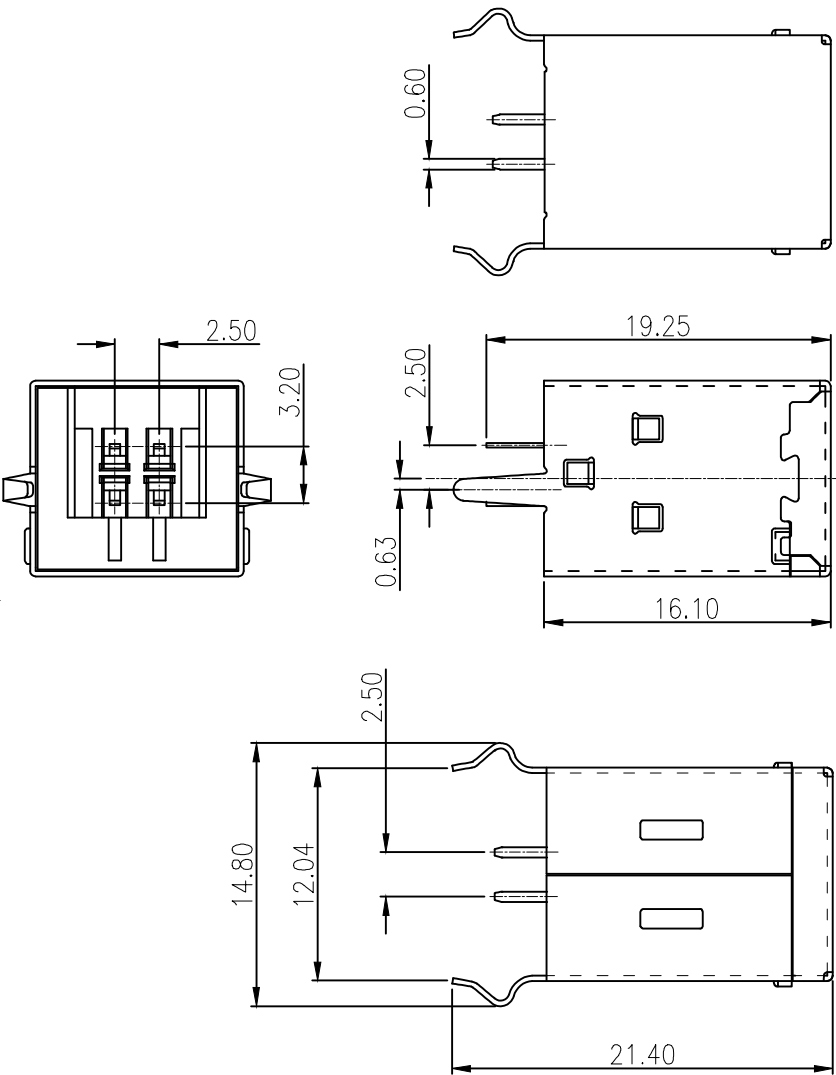

單位: mm		DFTO:	DATE:	ELLAX CORPORATION. TITLE: USB-BF-180度彎腳		
長度公差	角度公差	CHKD:	DATE: 2019.02.22			
.0±0.25	0°±5°	APPVL:	DATE: 2019.02.22			
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL: 材 質	DWG NO. ELUB02-USBB04-195 SIZE A4 REV A		
			TREAT: 處 理			
			QTY: 數 量			
			SCALE: 比 例 2.5 : 1			
THIRD ANGLE PROJECTION			PART NO: 零件編號	1 of 1		