



REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

MECHANICAL:

- 1.HOUSING:LCP BLACK, UL 94V-0
- 2.CONTACT:PHOSPHOR BRONZE T=0.30MM
- 3.PLATING:6U" PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL.
- 4.SHELL:BRASS T=0.20
- 5.OPERATING LIFE:750 CYCLES MIN.
- 6.MATING/UNMATING FORCE: 30N/3.06KGf MAX.
- 7.RETENTION STRENGTH:50N OR 30N MIN.FOR 60S±5S

ELECTRICAL SPECIFICATIONS@25°C UNLESS OTHERWISE NOTED:


SPECIFICATION NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING: 125 VAC RMS
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 20mΩ MAX.
- 4.INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
- 5.DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1MINUTE

ENVIRONMENTAL:

- 1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- 2.GUARANTEED PERIOD:12 MONTHS
- 3.OPERATION: -40°C TO +85°C
- 4.MANUAL SOLDERING PARAMETERS:24H IR TEMPERATURE: 260±5°C 5~10 SECONDS.





單位: mm		DFTO: <i>in a</i>	DATE: 2017.08.07
長度公差	角度公差	CHKD: <i>Allen</i>	DATE: 2017.08.07
.0±0.25	0°±5°	APPVL: <i>W.B.Huang</i>	DATE: 2017.08.07
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
			TREAT: 處 理
			QTY: 數 量
			SCALE: 比 例 2.5 : 1
THIRD ANGLE PROJECTION			

ELLAX CORPORATION.

TITLE:

RJ45-CONNECTOR TAB-UP W/O LED W/ SHIELD

DWG NO.	EL2157-JS28S12	SIZE	REV
DRAWING NO: 圖檔編號	EL2157-JS28S12_A	A4	A
PART NO: 零件編號		1 of 1	

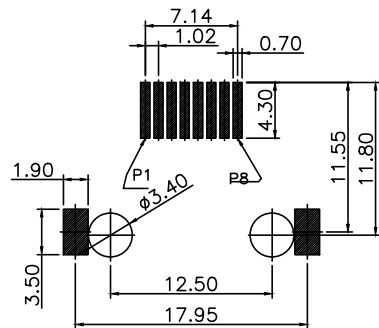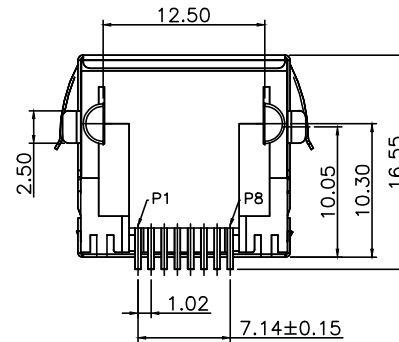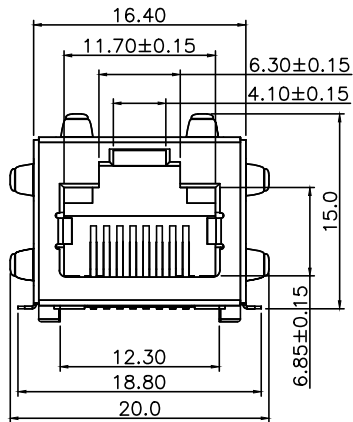

RECOMMENDED PCB LAYOUT
PTOLERANCE=±0.05

PART NUMBER: EL2157-JS28S1X

1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH