
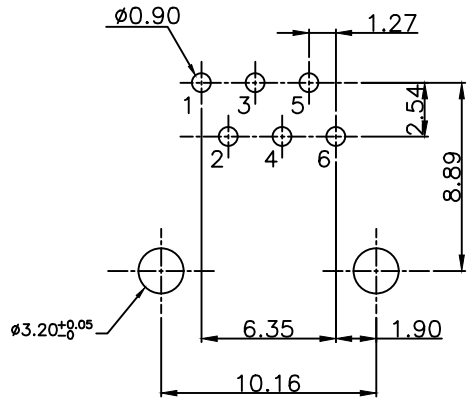
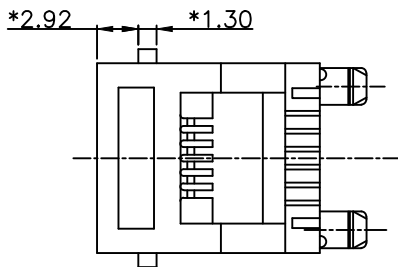
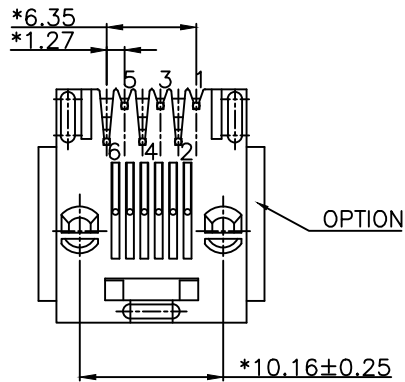
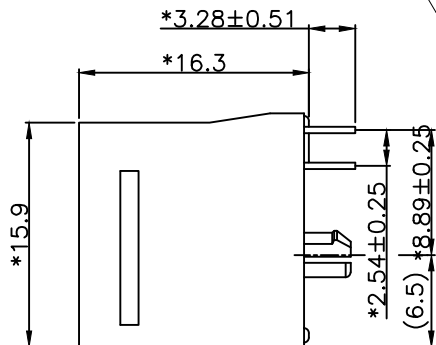


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

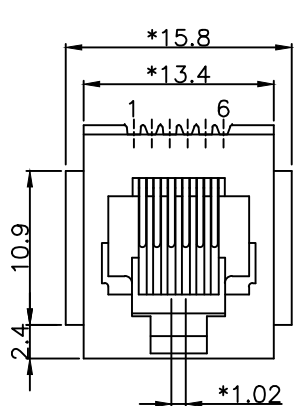

PC Board Layout
Component Side Shown
Dimension Tolerance:±0.05

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS MIN.
- CURRENT RATING : 1.5 AMP MIN.
- CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT OR NYLON+30%GF. UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION : -40°C TO +85°C.
- WAVE SOLDERING TEMPERRATURE: 230~240°C(3~5 SECONDS) FOR PBT, 250~260°C(5~10 SECONDS) FOR NYLON.
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E345295

PART NUMBER: EL226X-X000XXX

NO. OF CONTACT
2-2C 4-4C
6-6C

Gold Plating:

1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

0-W/O LOGO
1-W/ "ZSNOW" LOGO
2-W/ "F" LOGO

3-W/ PANEL STOP
4-W/O PANEL STOP

Color Of Housing:
0-PBT BLACK
B-NYLON BLACK

單位: mm		DFTO: <i>inda</i>	DATE: 2017.05.12
長度公差	角度公差	CHKD: <i>Allen</i>	DATE: 2017.05.12
.0±0.25	0°±5°	APPVL: <i>W.B.Huang</i>	DATE: 2017.05.12
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
		TREAT: 處 理	DWG NO. EL226X-0000032
		QTY: 數 量	DRAWING NO: EL226X-0000032_A
		SCALE: 1:1 比 例	PART NO: 零件編號

ELLAX CORPORATION.

TITLE:

180° TOP ENTRY PCB JACK 6P

SIZE	REV
A4	A
1 of 1	