
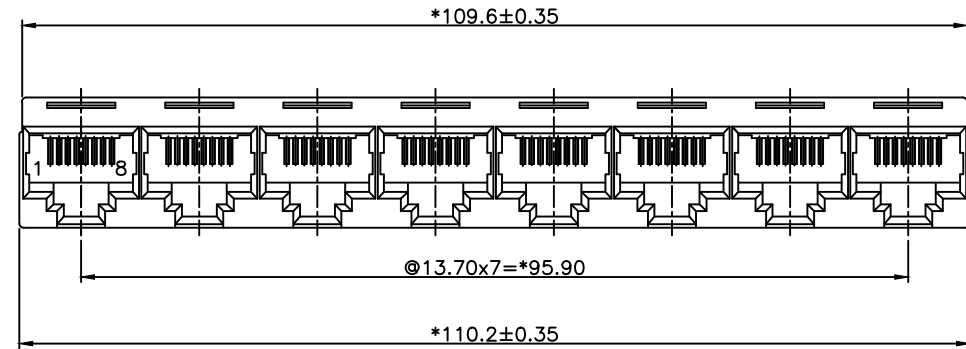


PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05

RoHS

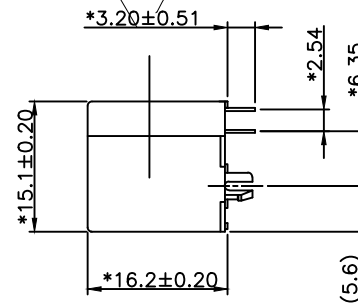

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT UL94V-0.
COLOR:BLACK
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERRATURE: 230°C ~240°C (3~5 SECONDS).
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E345295

PART NUMBER: EL2288-038E04X

0-W/O LOGO
8-8 PORT.
1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH

單位: mm		DFTO: 	DATE: 2017.08.07	ELLAX CORPORATION TITLE: RJ45 1X8 TOP ENTRY PCB JACK			
長度公差	角度公差	CHKD: Eason	DATE: 2017.08.07				
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2017.08.07				
.00±0.15		脫模角:	顏色:				
.000±0.10			MATERIAL: 材 質	DWG NO. EL2288-038E045 SIZE REV DRAWING NO: EL2288-038E045_A A4 A PART NO: 零件編號 1 of 1			
			TREAT: 處 理				
			QTY: 數 量				
		SCALE: 比 例 2.5 : 1					
THIRD ANGLE PROJECTION							