
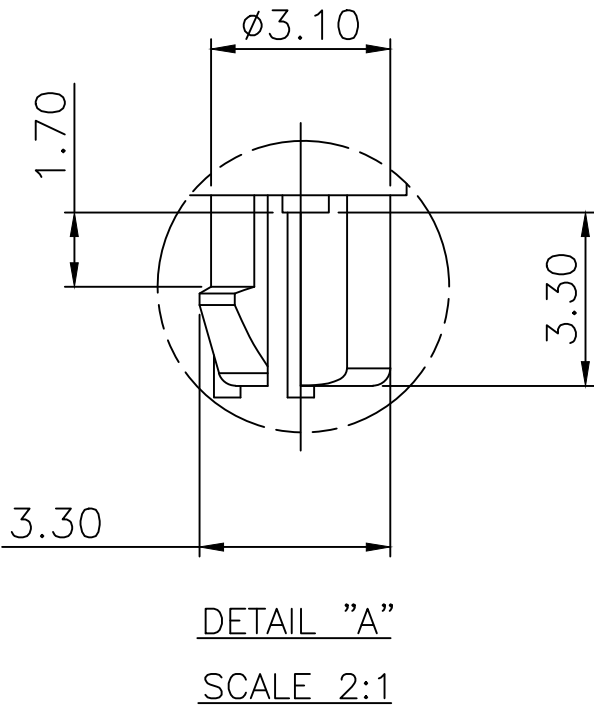
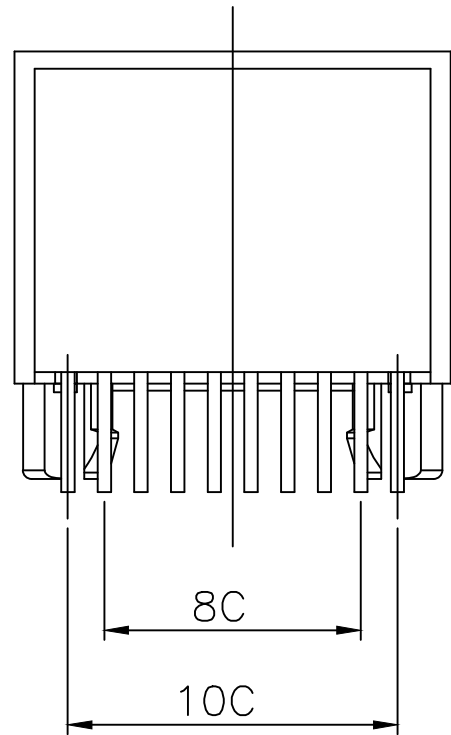
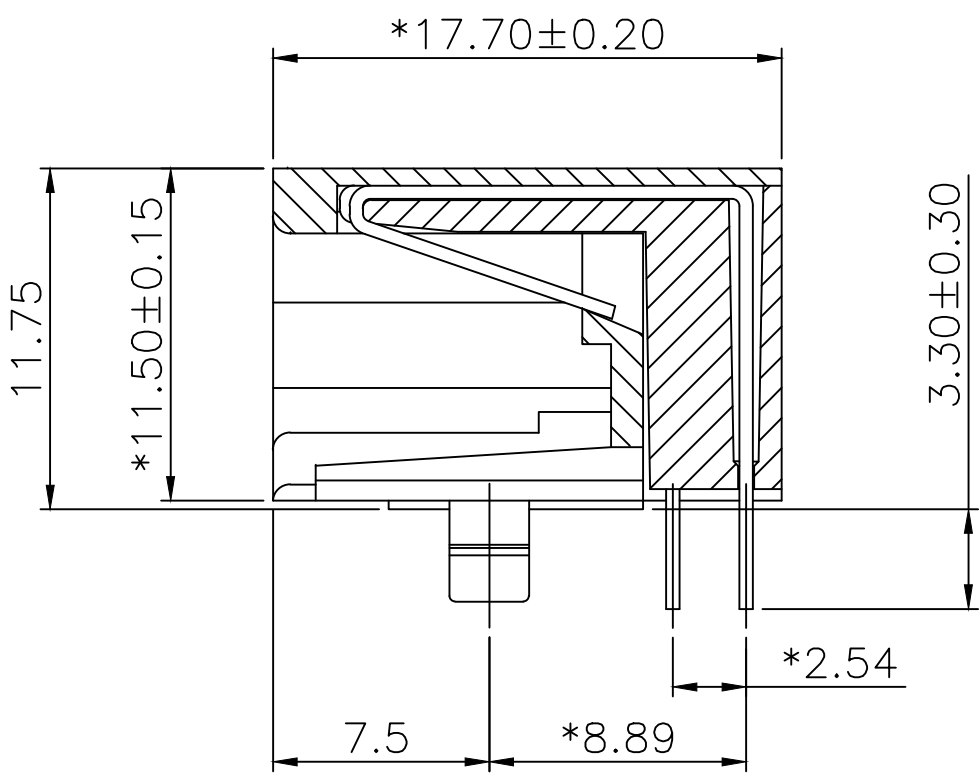


REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

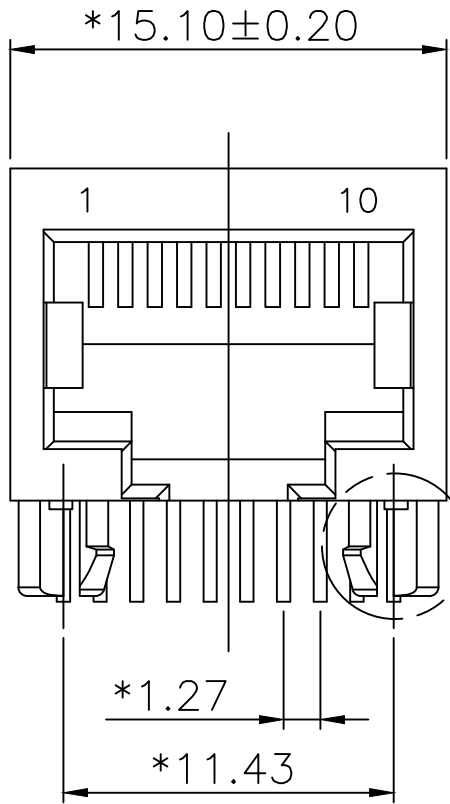

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: EL260X-X00006X

NO. OF CONTACT


4-4 CONTACTS(1,2,3,6C)

8-8 CONTACTS


1-10 CONTACTS

0-W/O LOGO

1-3u", 2-6u", 3-15u"
4-30u" 5-50u" F-GOLD FLASH

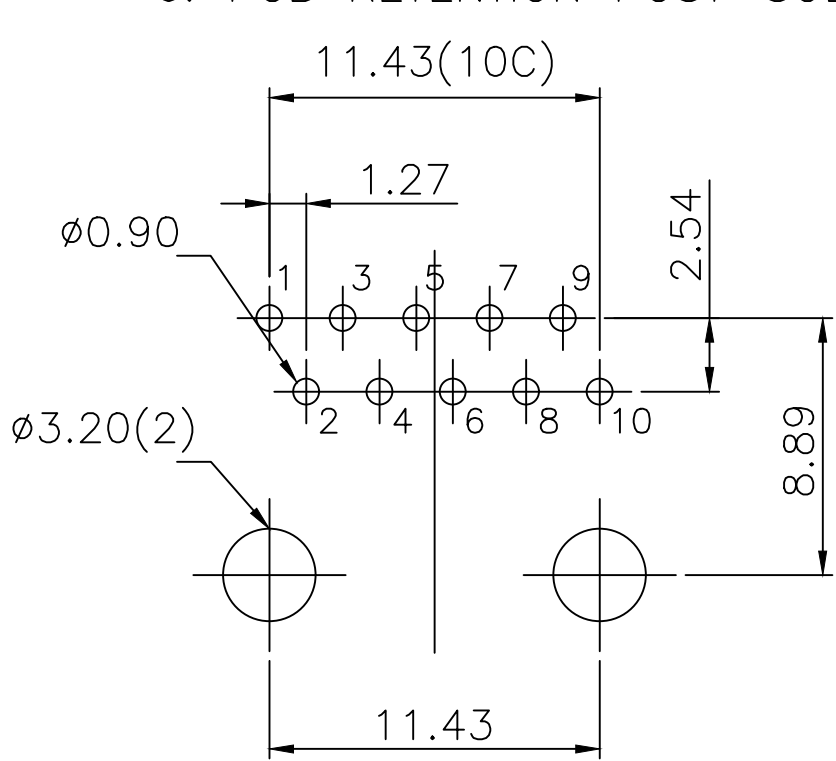

OPTION OF 10P10C
PC Board Layout t = 1.60mm
Component Side Shown Tolerance ±0.05mm

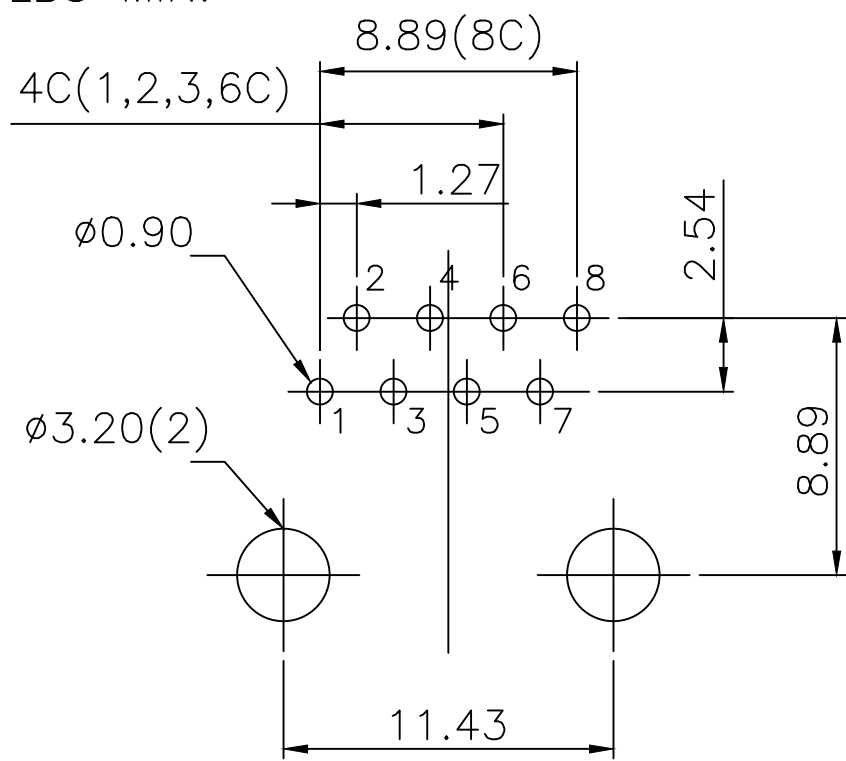

OPTION OF 10P8C AND 10P4C
PC Board Layout t = 1.60mm
Component Side Shown Tolerance ±0.05mm

單位: mm		DFTO: Rose	DATE: 2019.04.16
長度公差	角度公差	CHKD: Eason	DATE: 2019.04.16
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.04.16
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
		TREAT: 處 理	DWG NO. EL2608-000006F
		QTY: 數 量	DRAWING NO: 圖檔編號 EL260X-X00006X
		SCALE: 比 例 1:1	PART NO: 零件編號

ELLAX CORPORATION

TITLE:

11.5 SIDE ENTRY PCB GANG JACK 10P

SIZE	REV
A4	A
1 of 1	