

A

B

C


D

A

B

C

單位: mm		DFTO: ina	DATE: 2019.04.16	ELIAX CORPORATION TITLE: 11.5 SIDE ENTRY PCB GANG JACK 10P		
長度公差	角度公差	CHKD: Jerry	DATE: 2019.04.16			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.04.16			
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL: 材 質	DWG NO. EL2608-000A06F SIZE REV		
THIRD ANGLE PROJECTION			TREAT: 處 理			
			QTY: 數量	DRAWING NO: 圖檔編號 EL260X-X00AXXX		A4 A
			SCALE: 比 例 1:1	PART NO: 零件編號		1 of 1

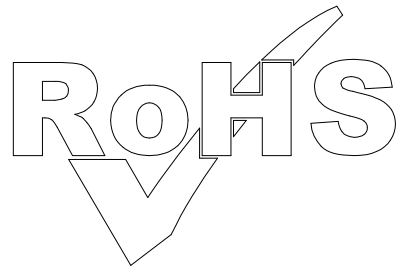

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94-V0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. MATING/UNMATING FORCE : 22N MAX.
6. RETENSION STRENGTH : 50N MIN.

ENVIRONMENTAL:






1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.
3. WAVE SOLDERING TEMPERRATURE: $230\sim 240^{\circ}\text{C}$ (3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: EL260X-X00AXXX

NO. OF CONTACT 1-3u" 2-6u" 3-15u"
8-8 CONTACTS 4-30u" 5-50u" F-GOLD FLASH

0-W/O LOGO 06-PBT BLACK

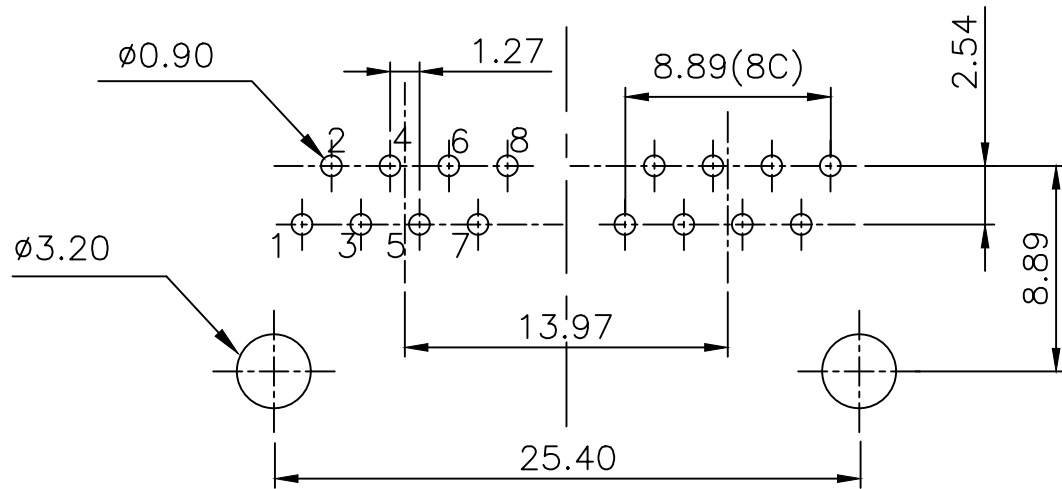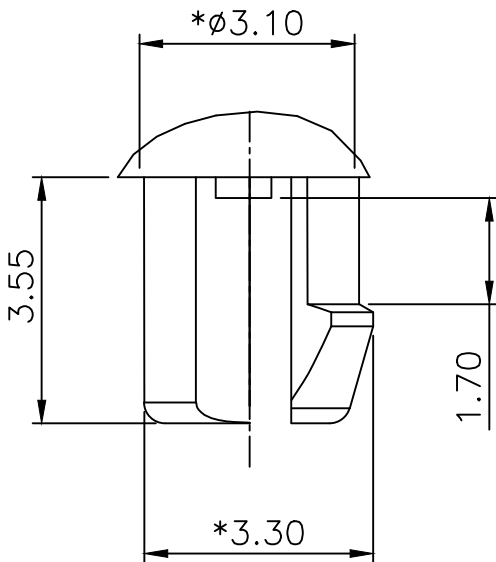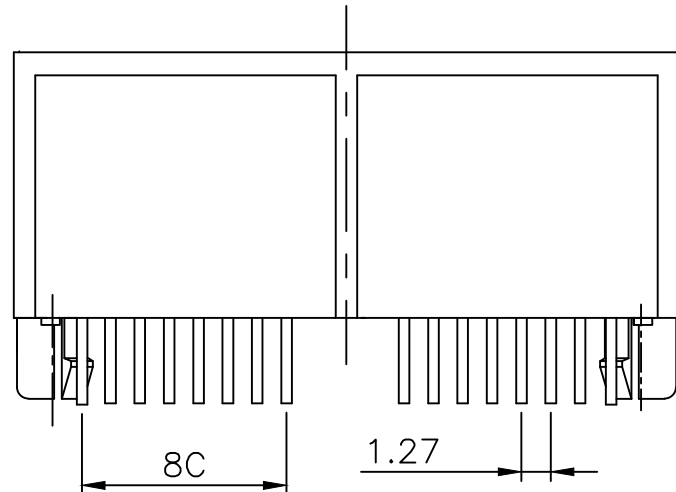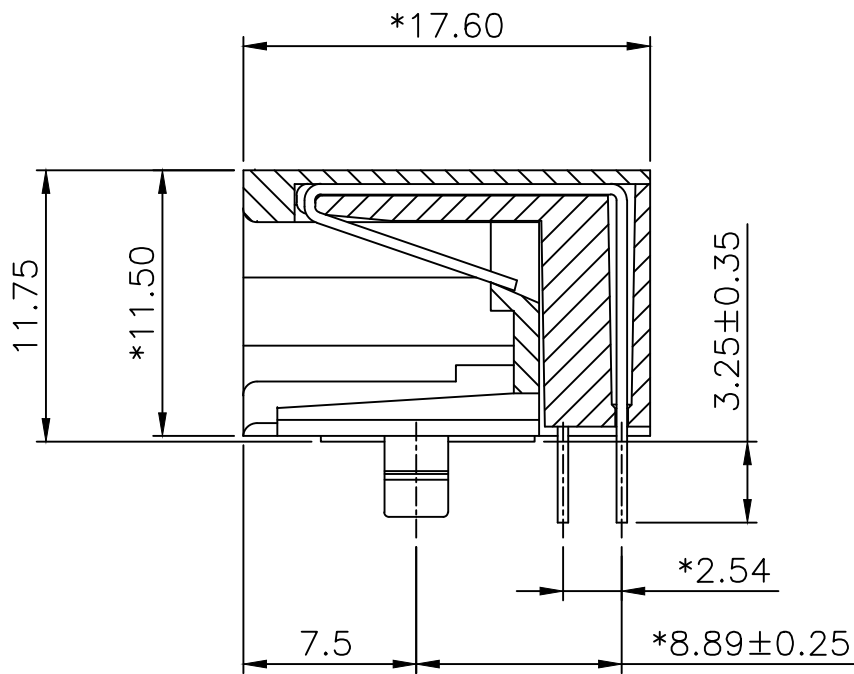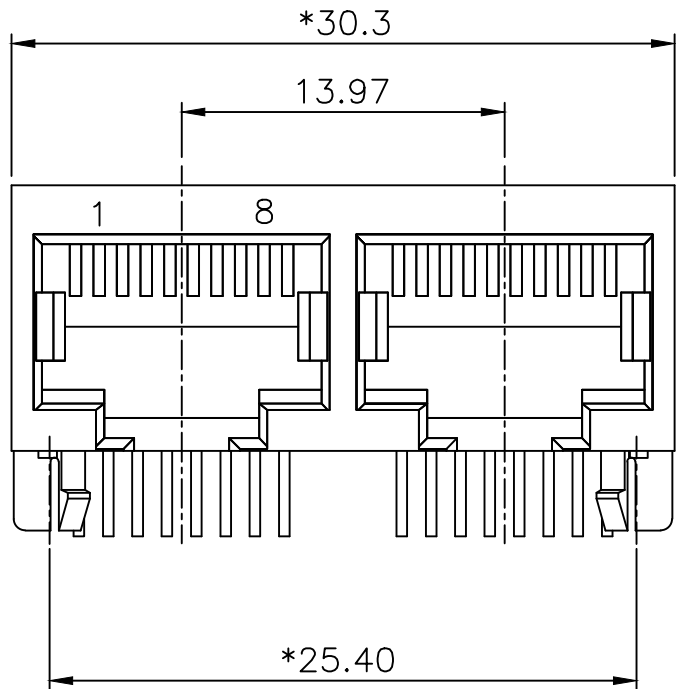

PC Board Layout t = 1.60mm
Component Side Shown
Tolerance: $\pm 0.05\text{mm}$