





REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

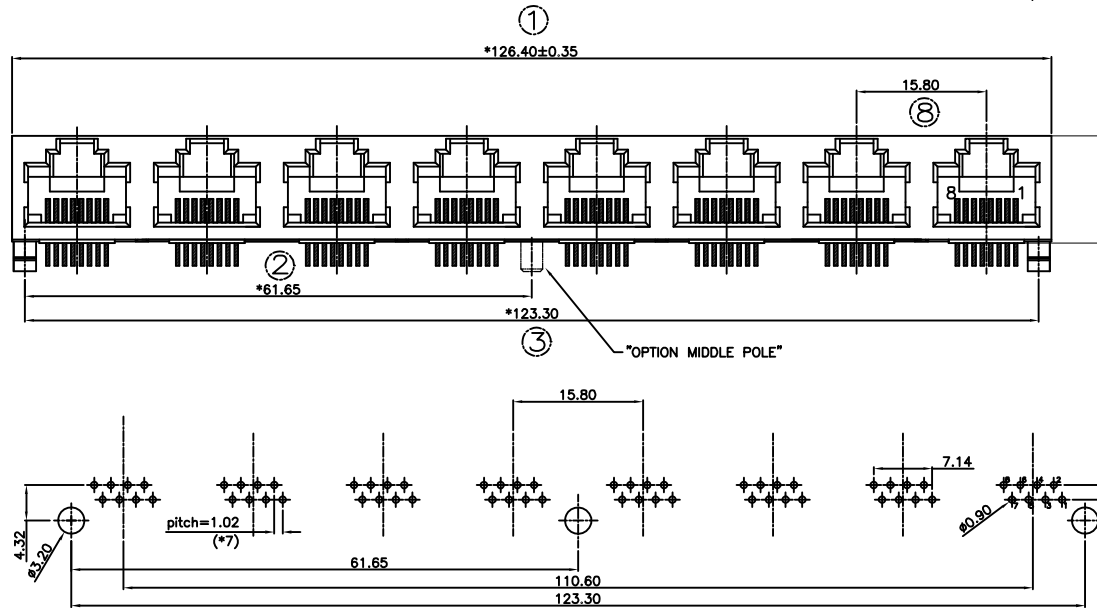

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05



NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT. /COLOR:BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm OR 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~250°C(3~5 SECONDS).
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: EL2J88-000G0GX

0-W/O LOGO

1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH

G-NO SHIELD STAMP PIN.
H-NO SHIELD ROUND PIN.

9-8 PORTS W/O MIDDLE POLE
G-8 PORTS W/ MIDDLE POLE

單位: mm		DFTO: 100	DATE: 2017.06.07	ELLAX CORPORATION. TITLE: RJ45 1X8 W/O LED W/O SHIELD JACK		
長度公差	角度公差	CHKD: Allen	DATE: 2017.06.07			
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2017.06.07			
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL: 材 質	DWG NO.	EL2J88-000G0GX	SIZE
			TREAT: 處 理	DRAWING NO:	EL2J88-000G0GX_A	REV
			QTY: 數 量	圖檔編號		A4
			SCALE: 比 例	PART NO: 零件編號		A
THIRD ANGLE PROJECTION			2.5:1			1 of 1