

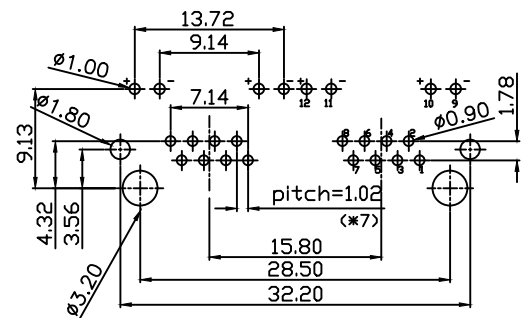
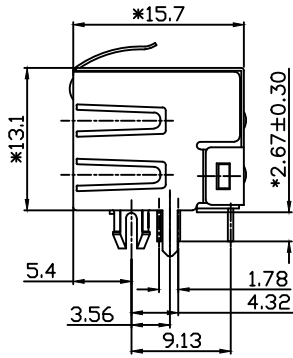
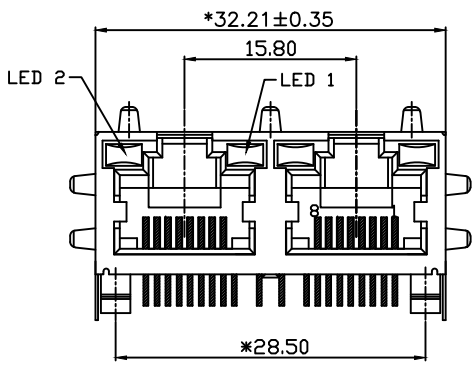






REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD



PCB (t=1.60mm) Layout
Component Side Shown



NOTES:
ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.
6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
7. OPERATING: 750 CYCLES MIN.
MECHANICAL:
1. HOUSING MATERIAL : PBT UL94V-0. /COLOR:BLACK.
2. INSERT MATERIAL : PBT UL94V-0. /COLOR:BLACK.
3. LENS MATERIAL : PC. /COLOR:CLEAR.
4. BACK PLATE MATERIAL: PBT UL94V-0. /COLOR:BLACK.
5. LED SIZE : 3.2*2.0*7.0*P=2.54mm.
6. SHIELD MATERIAL : COPPER ALLOY.
7. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm OR Ø0.46mm.
8. PLATING : GOLD PLATING OVER NICKEL.
9. PCB RETENTION PRE-SOLDER: 1 LB MIN.
10. PCB RETENTION POST-SOLDER: 10 LBS MIN.
ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 230~250°C(3~5 SECONDS)
4. RoHS COMPLIANT.
MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

PART NUMBER: EL2J88-XXXXA0XX

0-W/D LOGO

- 1-3u'
- 2-6u'
- 3-15u'
- 4-30u'
- 5-50u'
- D-1.5u'
- F-GOLD FLASH
- 1-TIN SHIELD STAMPED PIN.
- 2-NI SHIELD STAMPED PIN.
- 3-TIN SHIELD ROUND PIN.
- 4-NI SHIELD ROUND PIN.
- 1-W/D TAB
- 2-W/ TOP TABS.
- 3-W/ SIDE TABS.
- 4-W/ TOP TABS AND SIDE TABS.

- 1-LED1: GREEN, LED2: YELLOW
- 2-LED1: GREEN, LED2: GREEN
- 3-LED1: YELLOW, LED2: GREEN
- 4-LED1: G+Y, LED2: G+Y
- 5-LED1: RED, LED2: GREEN
- 7-LED1: YELLOW, LED2: YELLOW
- D-LED1: G+R, LED2: G+R
- E-LED1: GREEN, LED2: RED
- K-LED1: GREEN, LED2: G+Y
- P-LED1: Y+R, LED2: GREEN
- Q-LED1: G+Y, LED2: G+R
- S-LED1: Y+R, LED2: Y+R
- N-LED1: G+Y, LED2: GREEN

單位: mm		DFTO:	DATE: 2019.01.19
長度公差	角度公差	CHKD: Eason	DATE: 2019.01.19
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.01.19
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
		TREAT: 處 理	DWG NO. EL2J88-XXXXA0XX
		QTY: 數 量	DRAWING NO: 圖檔編號 EL2J88-XXXXA0XX_A
		SCALE: 比 例 1:1	PART NO: 零件編號

ELLAX CORPORATION.

TITLE: 1x2 LED GANG JACK			
DWG NO.	EL2J88-XXXXA0XX	SIZE	REV
DRAWING NO: 圖檔編號	EL2J88-XXXXA0XX_A	A4	A
PART NO: 零件編號		1 of 1	