





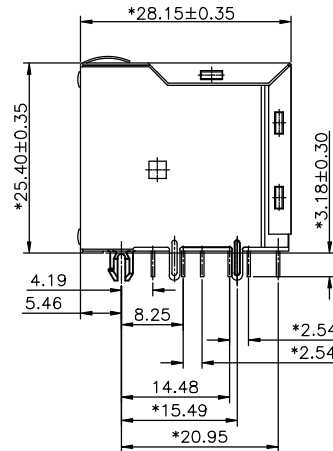

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

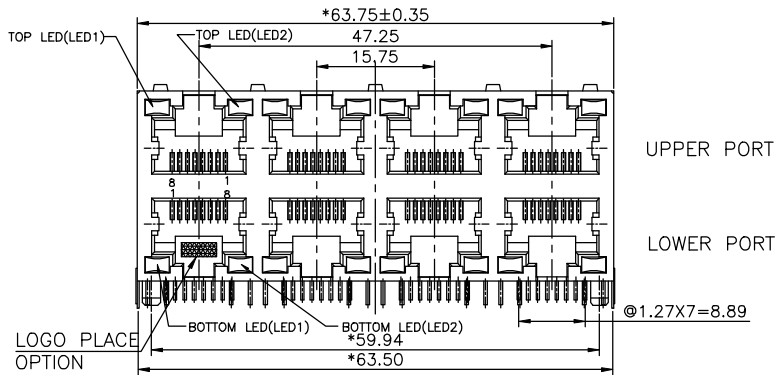

PART NUMBFR:EL2J88-XN4TFCX-L

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON UL94V-0./COLOR:BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 250~260°C(5~10 SECONDS).
- RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO


FCC PART 68, SUBPART F.

CUL FILE NO. E345295


PART NUMBER: EL2J88-0X4TFCX

0-W/O LOGO 1-3u" 2-6u" 3-15u" 4-30u" 5-50u" F-GOLD FLASH

A-LED1:GREEN, LED2:GREEN
B-LED1:GREEN, LED2:ORANGE
C-LED1:GREEN, LED2:YELLOW
L-LED1:YELLOW, LED2:GREEN
N-LED1:GREEN&YELLOW, LED2:GREEN
K-LED1:GREEN, LED2:GREEN&YELLOW




PART NUMBFR:EL2J88-XK4TFCX-L

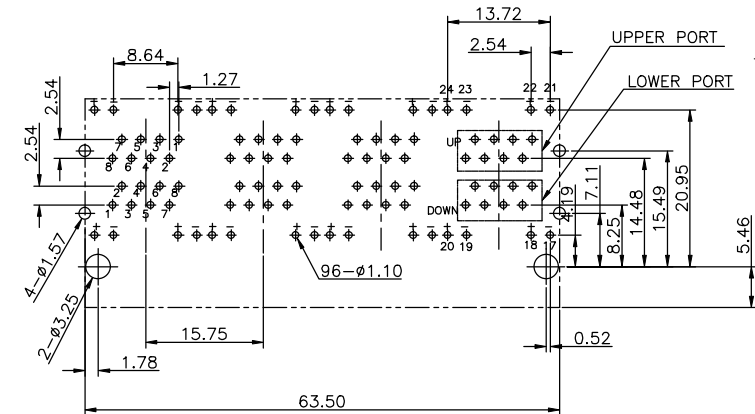

PC Board Layout Component Side Shown

PC Board Thickness=1.6mm

Tolerance±0.05

單位: mm		DFTO: 	DATE: 2017.08.17	ELLAX CORPORATION				
長度公差	角度公差	CHKD: 	DATE: 2017.08.17					
.0 ± 0.25	0° ± 5 °	APPVL: 	DATE: 2017.08.17					
.00 ± 0.15	脫模角:	顏色:	MATERIAL:	TITLE: RJ45 2x4 STACKED GANGED LED JACK				
.000 ± 0.10			材 質					
		TREAT:	DWG NO.	EL2J88—0C4TFCF		SIZE	REV	
		處 理	QTY:	DRAWING NO:	EL2J88—0C4TFCF_A		A4	A
		數量	圖檔編號					
		SCALE:	PART NO:					
THIRD ANGLE PROJECTION		比 例	2.5 : 1			1 of 1		