REVISION RECORD 修 改 紀 錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

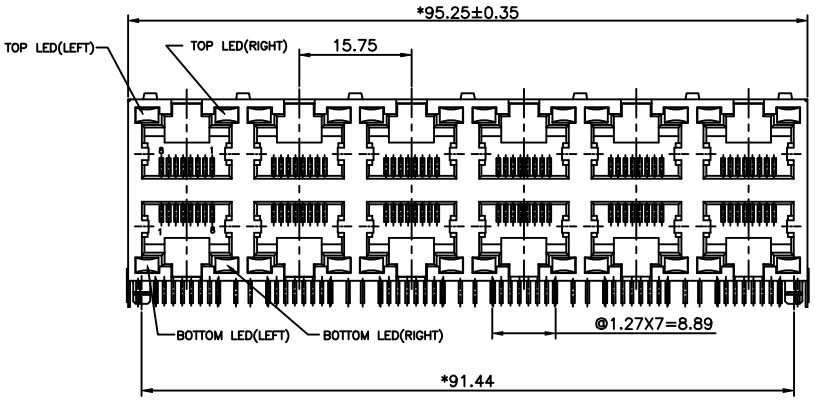

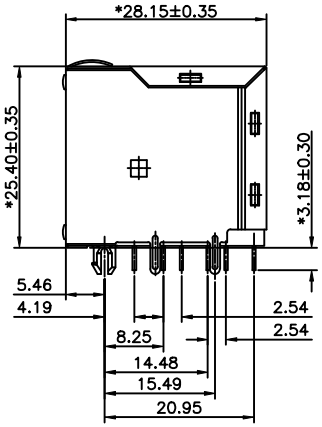



PART NUMBER: EL2J88-XV2PZBX



PART NUMBER: EL2J88-XA2PZBX

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RoHS PART NUMBER: EL2J88-0X2PYFX

0-W/O LOGO

Gold Thickness:
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

A-RIGHT:GREEN LEFT:GREEN
B-RIGHT:ORANGE LEFT:GREEN
C-RIGHT:YELLOW LEFT:GREEN
L-RIGHT:GREEN LEFT:YELLOW
V-RIGHT:GREEN+YELLOW LEFT:GREEN+YELLOW

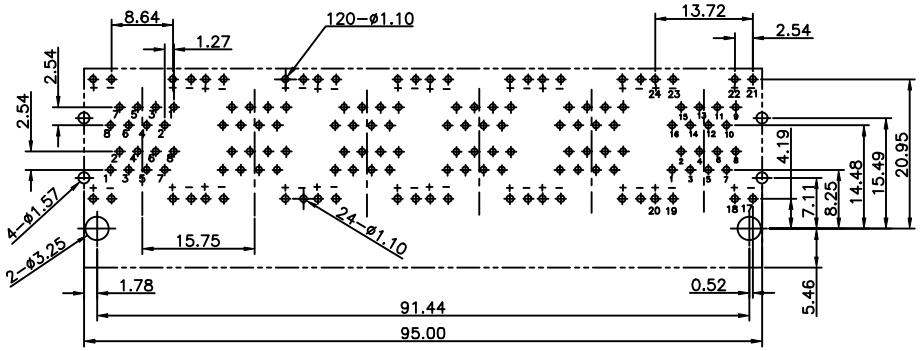

PCB LAYOUT(t=1.60mm)

單位: mm		DFTO: Ina	DATE: 2017.08.17
長度公差	角度公差	CHKD: Allen	DATE: 2017.08.17
.0 ± 0.25	0° ± 5°	APPVL: W.B.Huang	DATE: 2017.08.17
.00 ± 0.15		脫模角:	顏色:
.000 ± 0.10			MATERIAL: 材 質
			TREAT: 處 理
			QTY: 數 量
THIRD ANGLE PROJECTION			SCALE: 比 例 2.5 : 1

ELLAX CORPORATION.

TITLE: RJ45 2x6 STACKED GANGED LED JACK

DWG NO.	EL2J88-0L2PYFF	SIZE	REV
DRAWING NO: 圖檔編號	EL2J88-0L2PYFF_A	A4	A
PART NO: 零件編號		1 of 1	