


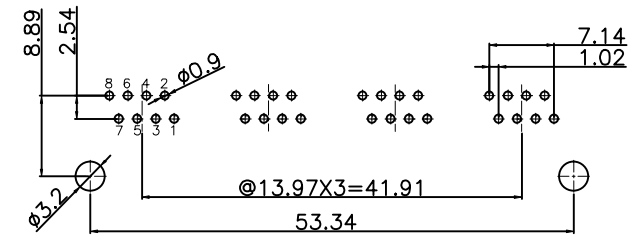



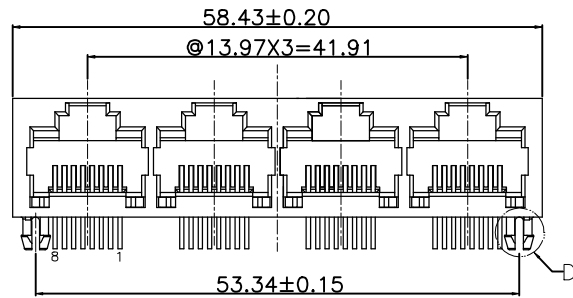

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD



RECOMMENDED PCB LAYOUT

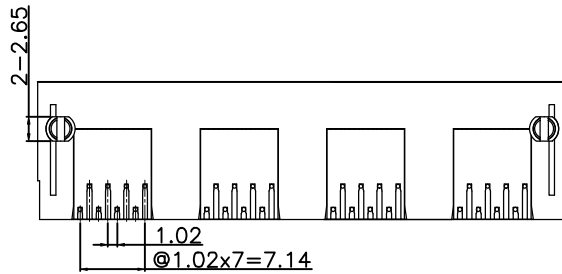

DETAIL D
SCALE 2:1

PART NUMBER: EL2J88-J100S4X

2-2C
D-4C
6-6C
8-8C
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH
H-1u"
00-W/O LOGO, BLACK

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MΩ MAX.
- INSULATION RESISTANCE : 500 MΩ MIN.
- DIELECTRIC STRENGTH : 1000V AC(50-60Hz) 0.5mA 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION : -40°C TO +85°C.
 - WAVE SOLDERING TEMPERATURE: 250~260°C(3~5 SECONDS).
 - RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

單位: mm		DFTO: <i>ind</i>	DATE: 2017.08.07	ELLAX CORPORATION. TITLE: RJ45 1X4 Latch Up Jack		
長度公差	角度公差	CHKD: <i>Allen</i>	DATE: 2017.08.07			
.0±0.25	0°±5°	APPVL: <i>W.B.Huang</i>	DATE: 2017.08.07			
.00±0.15		脫模角:	顏色:			
.000±0.10			MATERIAL: 材 質	DWG NO.	EL2J88-J100S4H	SIZE
			TREAT: 處 理			REV
			QTY: 數 量	DRAWING NO:	EL2J88-J100S4H_A	A4
			SCALE: 比 例	PART NO: 零件編號		1 of 1
THIRD ANGLE PROJECTION			2.5:1			