




REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD

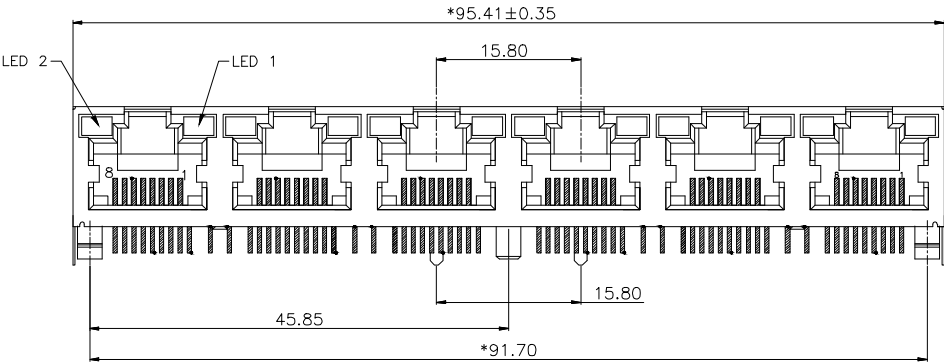

GREEN GREEN
YELLOW YELLOW
FOR P/N:ZW2J88-J401S6X

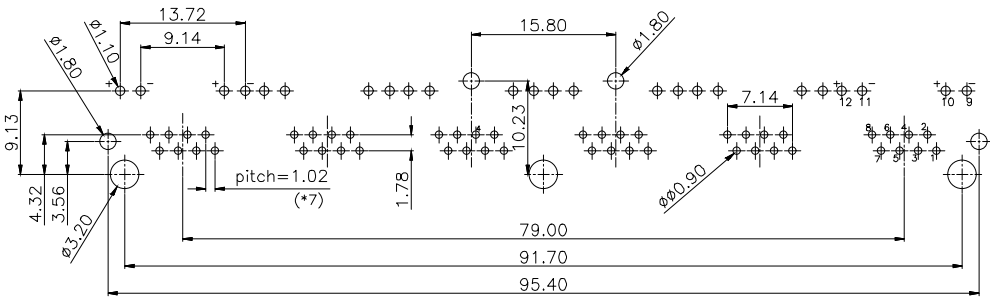

PC Board Layout(t=1.60)
Component Side Shown

- NOTES:
- ELECTRICAL:**
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - 5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.
 - 6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
 - 7. OPERATING: 750 CYCLES MIN.
- MECHANICAL:**
- 1. HOUSING MATERIAL : PBT UL94V-0. /COLOR:BLACK.
 - 2. LED SIZE : 3.2*2.0*4.0*P=2.54mm.
 - 3. SHIELD MATERIAL : COPPER ALLOY.
 - 4. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
 - 5. PLATING : GOLD PLATING OVER NICKEL.
 - 6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - 7. PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -40°C TO +85°C.
 - 3. WAVE SOLDERING TEMPERRATURE: 230~240°C(3~5 SECONDS).
 - 4. RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

PART NUMBER: EL2J88-J4XXS6X

J-W/D LOGO

1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

01-W/D LOGO, W/D TAB

單位: mm		DFTO: Rose	DATE: 2019.04.16
長度公差	角度公差	CHKD: Eason	DATE: 2019.04.16
.0±0.25	0°±5°	APPVL: W.B.Huang	DATE: 2019.04.16
.00±0.15		脫模角:	顏色:
.000±0.10			MATERIAL: 材 質
		TREAT: 處 理	DWG NO. EL2J88-J401S6F
		QTY: 數 量	DRAWING NO: EL2J88-J4XXS6X
		SCALE: 比 例 1:1	PART NO: 零件編號

ELLAX CORPORATION

TITLE: 1x6 GANG JACK w/ LED

DWG NO.	EL2J88-J401S6F	SIZE	REV
DRAWING NO:	EL2J88-J4XXS6X	A4	A
PART NO:	零件編號	1 of 1	