



REVISION RECORD 修改紀錄					
REV	ECD	DESCRIPTION	DATE	DRFT	CHKD


SPECIFICATIONS

MATERIAL:

1. Housing : LIQUID CRYSTAL POLYMER. Polyester UL94V-0
2. Color : Black
3. Contacts : Selective Gold Plating
4. Shield : 0.20mm Thickness C2680 Alloy With Au and Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

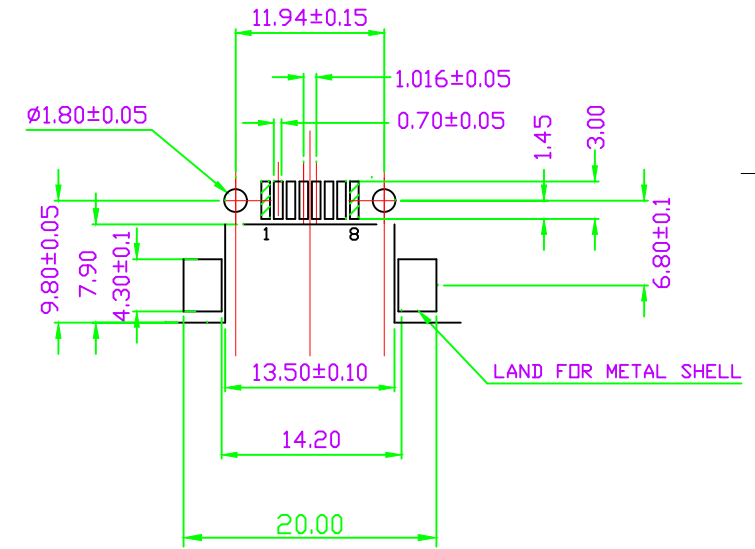

PCB LAYOUT

RJ45-YL12-S1B-*

PLATING GOLD

1:Fu" 2:3u"
3:6u" 4:15u"
5:30u" 6:50u"

Housing Color:Black

Housing 1 Port

表示SMT款



單位: mm		DFTO: <u>ing</u>	DATE: 2019-03-06	ELLAX CORPORATION.		
長度公差	角度公差	CHKD: <u>Eason</u>	DATE: 2019-03-06			
.0±0.25	0°±5°	APPVL: <u>W.B.Huang</u>	DATE: 2019-03-06	TITLE: PHONE JACK SMT TYPE SINGLE PDRY<數名規格>		
.00±0.15		脫模角:	顏色:	DWG NO. RJ45-YL12-S1B-*		
.000±0.10			MATERIAL: 材 質			
			TREAT: 處 理	DRAWING NO. RJ45-YL12-S1B-*_A		
			QTY: 數 量	PART NO:		
			SCALE: 比 例 2:1	零件編號		
THIRD ANGLE PROJECTION				1 of 1		