

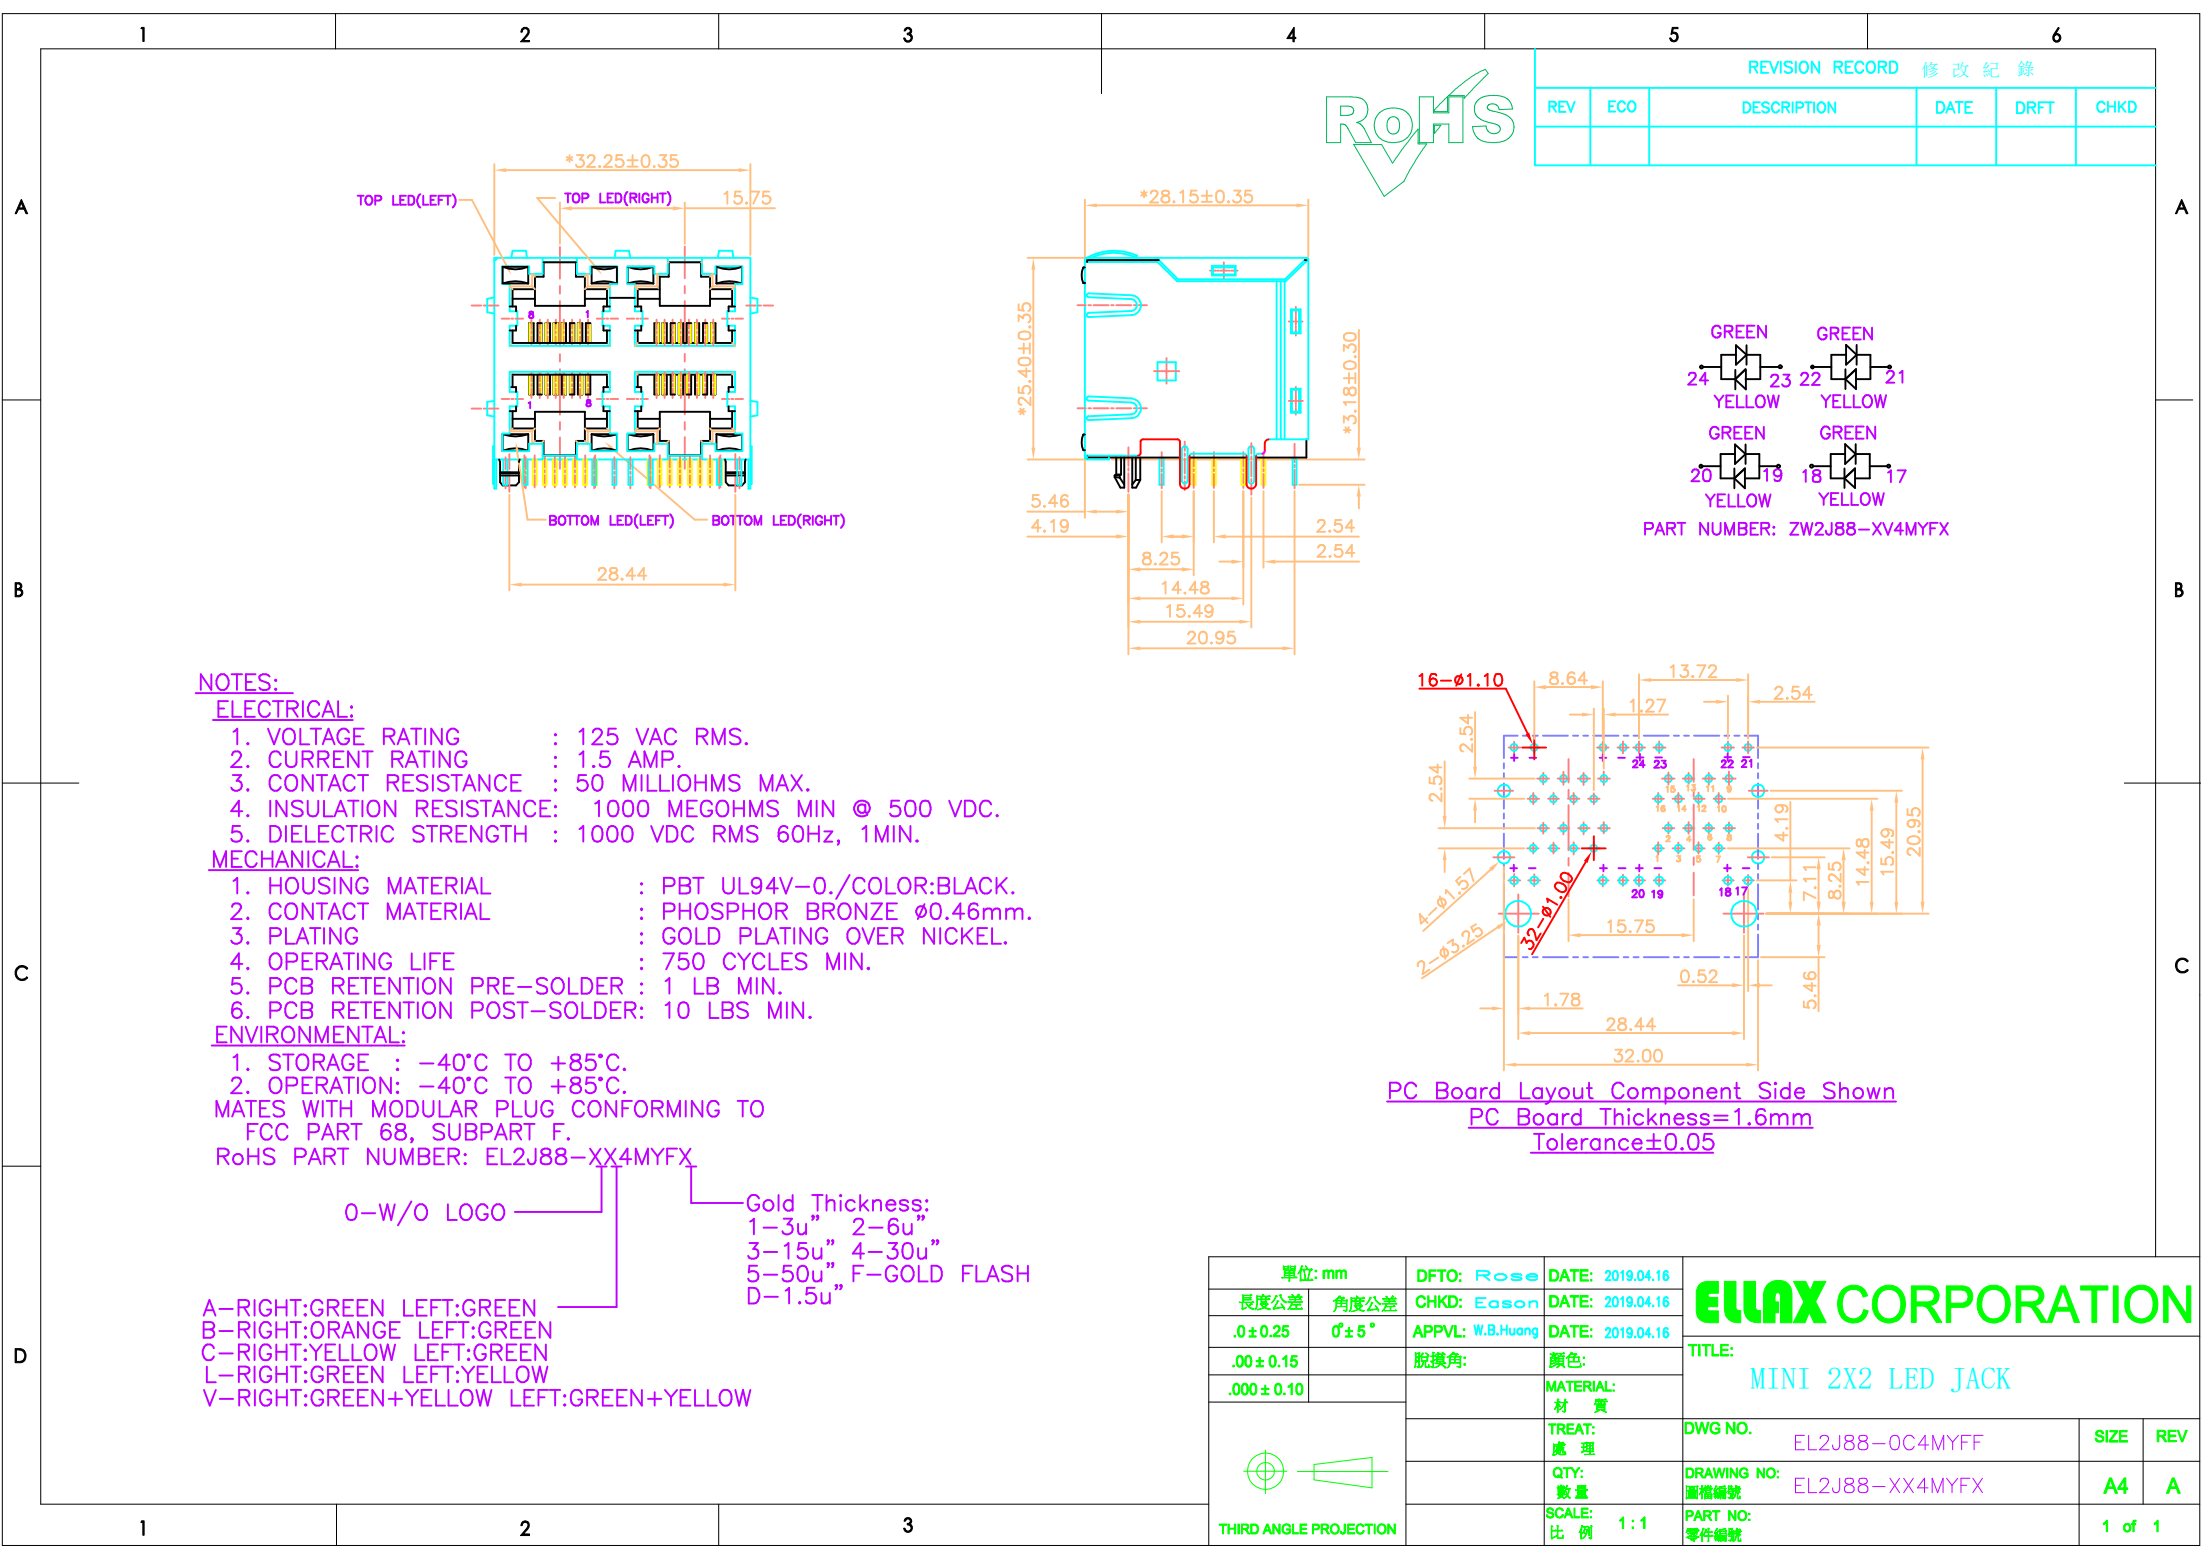


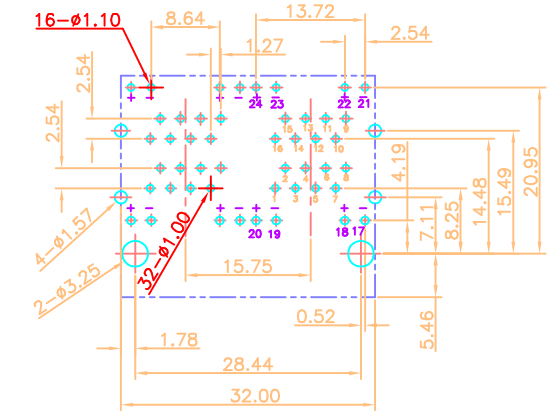

REVISION RECORD 修改紀錄					
REV	ECO	DESCRIPTION	DATE	DRFT	CHKD



PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance±0.05

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VDC RMS 60HZ, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
RoHS PART NUMBER: EL2J88-XX4MYFX

0-W/O LOGO

Gold Thickness:
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH
D-1.5u"

A-RIGHT:GREEN LEFT:GREEN
B-RIGHT:ORANGE LEFT:GREEN
C-RIGHT:YELLOW LEFT:GREEN
L-RIGHT:GREEN LEFT:YELLOW
V-RIGHT:GREEN+YELLOW LEFT:GREEN+YELLOW

單位: mm	DFTO: Rose	DATE: 2019.04.16
長度公差 角度公差	CHKD: Eason	DATE: 2019.04.16
.0±0.25 0°±5°	APPVL: W.B.Huang	DATE: 2019.04.16
.00±0.15	脫模角:	顏色:
.000±0.10	材 質:	MATERIAL:
	TREAT:	處理
	QTY:	數量
	SCALE:	比例 1:1
THIRD ANGLE PROJECTION		

ELLAX CORPORATION

TITLE: MINI 2X2 LED JACK			
DWG NO.	EL2J88-0C4MYFF	SIZE	REV
DRAWING NO: 圖檔編號	EL2J88-XX4MYFX	A4	A
PART NO: 零件編號		1 of 1	